


HSM SECURIO P40i

Office document shredder with **solid steel hardened cutting rollers, up to 40% more performance** and **continuous operation, on castors**



Technical data

	P-2	P-2	P-4	P-5	P-6	P-7
Product number	1881121	1880121	1883121	1882121	1885121	1884121
Cutting type	strip cut	strip cut	cross cut	cross cut	cross cut	cross cut
Cutting size, mm	5,8	3,9	4,5x30	1,9x15	0,78x11	1x5
Security levels (DIN 66399)	P-2, O-2, T-2, E-2	P-2, O-2, T-2, E-2	P-4, O-3, T-4, E-3, F-1	P-5, O-4, T-5, E-4, F-2	P-6, T-6, E-5, F-3	P-7, F-3
Cutting speed, mm/s	90 mm/s	90 mm/s	100 mm/s	100 mm/s	100 mm/s	140 mm/s
Cutting capacity (70 g/m ²)	64-66	49-51	38-40	24-26	14-16	11
Cutting capacity (80 g/m ²)	56-58	44-46	34-36	19-21	13-15	9
Throughput per hour	143 kg/h	113 kg/h	87 kg/h	48 kg/h	33 kg/h	23 kg/h
Shredder material						
Container volume, sheets	954	1305	1773	1845	1446	2667
Weight	67,0 kg	67,0 kg	72,0 kg	72,0 kg	72,0 kg	72,0 kg
Scope of delivery:						
- special lubrication oil	-	-	250 ml	250 ml	250 ml	250 ml
- reusable cardboard box	1 pc	1 pc	1 pc	1 pc	1 pc	1 pc
- reusable plastic bags	5 pc	5 pc	5 pc	5 pc	5 pc	5 pc



Noise level (idle)	55 dB(A)
Power consumption	1300 W
Voltage/Frequency	220-230 V / 50-60 Hz
Width x Height x Depth	580 x 1020 x 550 mm



Technical and design modifications are reserved

HSM[®]
Great Products, Great People.


HSM SECURIO P40i

Advantages at a glance




Multilingual touch display

supporting easy "swiping", intuitive usage, showing current operating status, incl. reverse, standby and key-lock buttons

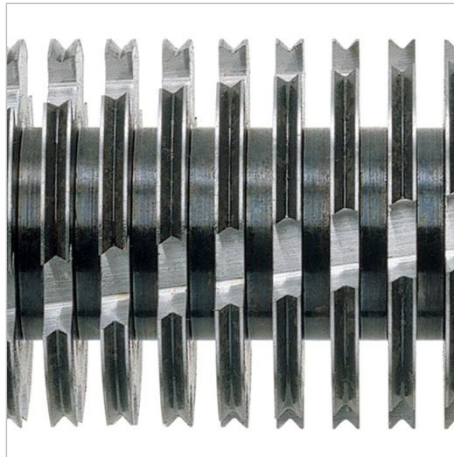

Hardened solid steel cutting rollers

The induction-hardened, solid steel cutting rollers are robust and ensure a high level of durability

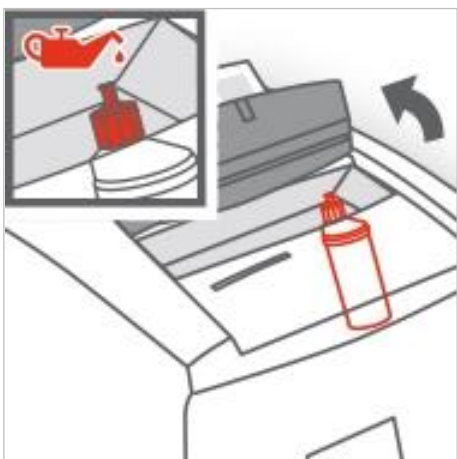


Integrated automatic oiler

with container volume of 250 ml for automatic oiling of shredder knives to ensure consistently high cutting capacity



Extra container for a CDs/DVDs

(approx. 4,5l) for CDs and further data carrier shredded in a separate cutting unit (in versions with a separate cutting unit)

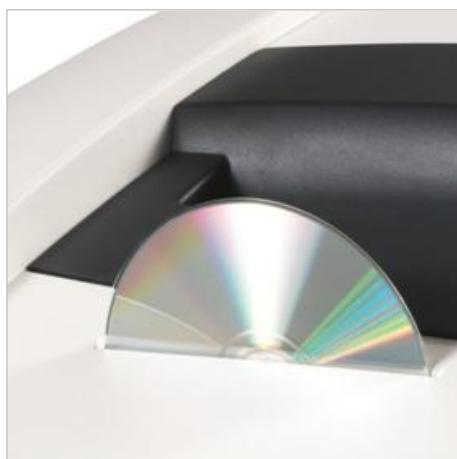

Separate CD/DVD cutting unit

optional cutting unit for optical data and further carrier (in 4x7 mm, O-4/T-5/E-4 or in OMDD version: 2x2 mm, O-6/T-6/E-5)







Pressure sensitive safety element

prevents unintentional entry. Automatically switches off if pressure is applied to the safety element



HSM SECURIO P40i

Touch display functionality

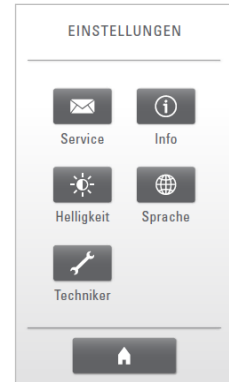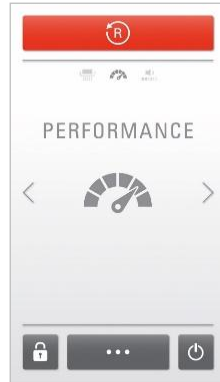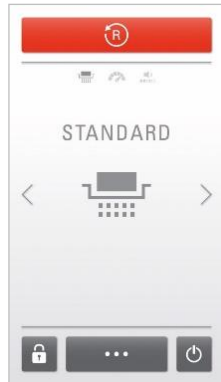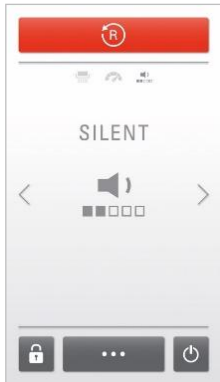

Different operation modes




3 operating modes selectable by swipe gestures subject to the current needs: STANDARD (for usual shredding), PERFORMANCE (for up to 40% higher performance) and SILENT (for the lowest operating noise)

Display lock

4 digits screen lock to avoid unapproved use

User menu

to adjust operating settings

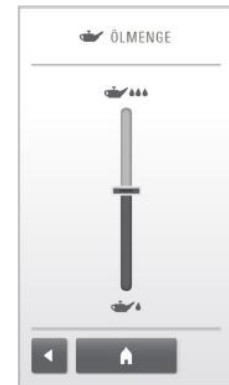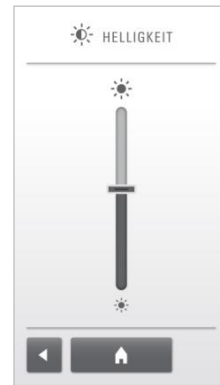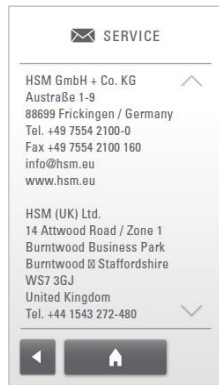

Display language

choose between many display languages

Service info

adjustable information field with your local service contacts

Shredder data


serial number, model, date of production and operating hours

Display intensity

adjustable brightness of touch display

Oil intervals

adjustable automatic oiling intervals

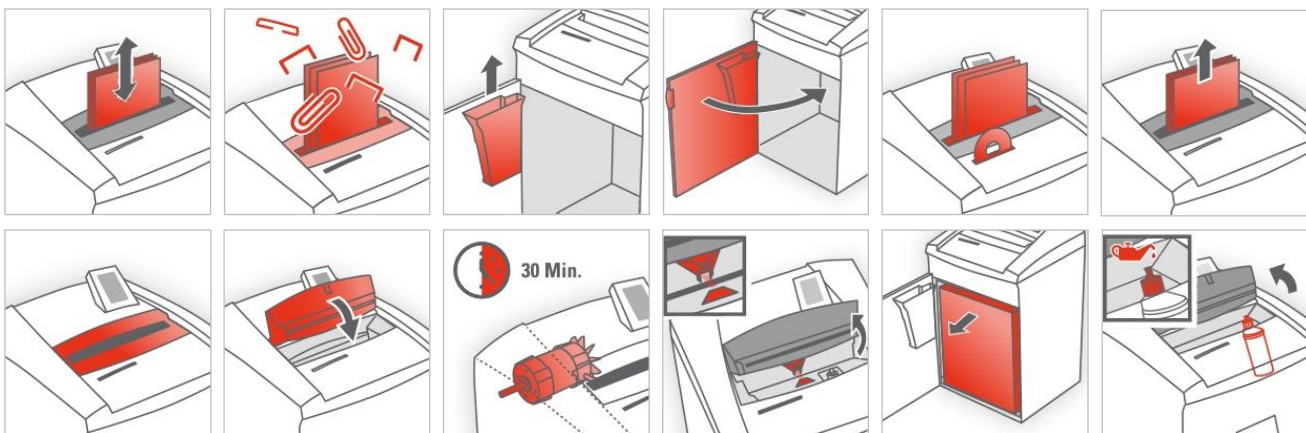

Comprehensive and vivid shredder status and guide to action indications

all you want to know in order to keep your shredder in operating condition include guidance to empty the bin, close the door, fill in special lubrication oil and operating status like reversing, detection of metal particles, intelligent paper jam prevention, malfunctions etc.


HSM SECURIO P40i

Available options




Separate CD cutting unit

additional cutting unit for optical and further data carrier in security levels O-4/T-5/E-4, 4x7 mm (product number P-4 or P-5 + "C")

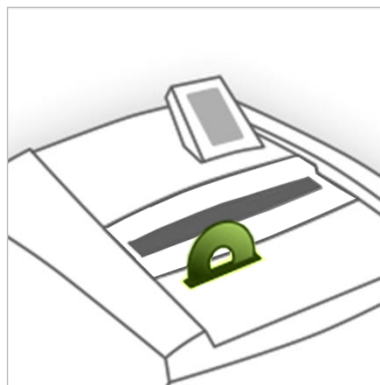


Separate OMDD cutting unit

additional cutting unit for optical and further data carrier in security levels O-6/T-6/E-5, 2x2 mm (product number P-6 or P-7 + "M")

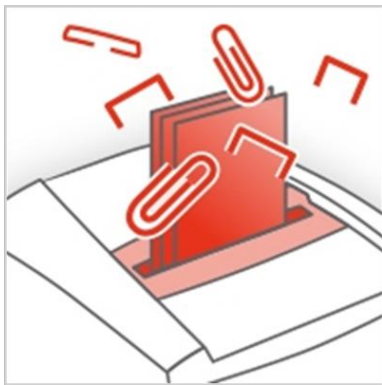

Metal detection

automatic stop when detecting of metal objects (like staples and clips) to avoid damage of cutting knives in security levels P-6 and P-7 (product number P-6 or P-7 + "D")

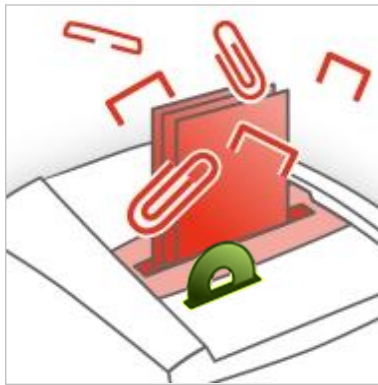

Separate OMDD cutting unit + metal detection

separate OMDD cutting unit in O-6 together with automatic detection of staples and clips (product number P-6 or P-7 + "N")

Consumables



Special lubricating oil

Canister 5l, Art. 1235997501
Bottle 250 ml, Art. 1235997403



Plastic bags

Reusable collecting bag,
Art. 1442995110, 10 pcs
Art. 1442995000, 100 pcs



Cardboard box

Robust reusable cardboard box
Art. 1850995200 (for P36i, P40i)